

1000-MR2-1

MOBILE REFRIGERATED CART



- The Alto-Shaam Mobile Refrigerated Cart is not just a refrigerator on wheels, but a well designed and efficient system for storing and transferring refrigerated food products.
- Condensate from the cooling coil is diverted to a condensate evaporator, therefore, it is unnecessary to have an alternate means of water disposal.
- Waste heat from the condensing unit efficiently evaporates (or vaporizes) condensate water from the evaporator and saves energy and eliminates potential service problems.
- Full perimeter bumper, flush transport handles, heavy duty casters along with the cart's reduced height provide easy mobility.
- A helicoil power cable keeps the power cord is out of the way during transportation.
- Stainless steel surfaces resists corrosion.
- Easy to clean interior and base.
- Full access front gives the operator 1300 mm of clear, unobstructed storage.
- All mechanical equipment is easily accessible for ease in servicing.
- Non-tilt pan slides.

Stainless steel exterior and door, fully insulated with 60 mm of polyurethane. Self-closing lockable door is hinged right as standard and includes a removable magnetic door gasket. The cart is supplied with twelve (12) sets of non-tilt pan slides.


Cart is factory preset to operate between -2°C and +4°C. High ambient (43°C) bottom mounted refrigeration system utilizes R134a refrigerant, generating 1584 BTU (399 KCAL) per hour. A LED display monitors the inside temperature. Audio visual temperature alarms is included as standard, along with HACCP capability, and automatic defrost. Unit includes a full-perimeter bumper guard along with two (2) flush transport handles on each end of the cart. Cart is furnished with four (4) heavy duty swivel casters — two (2) with brake.

MODEL 1000-MR2-1 - Single compartment Mobile Refrigerated Cart

FACTORY INSTALLED OPTIONS



- Electrical
 - 220V
- Door swing option
 - Right-hand door, standard
 - Left-hand door, optional

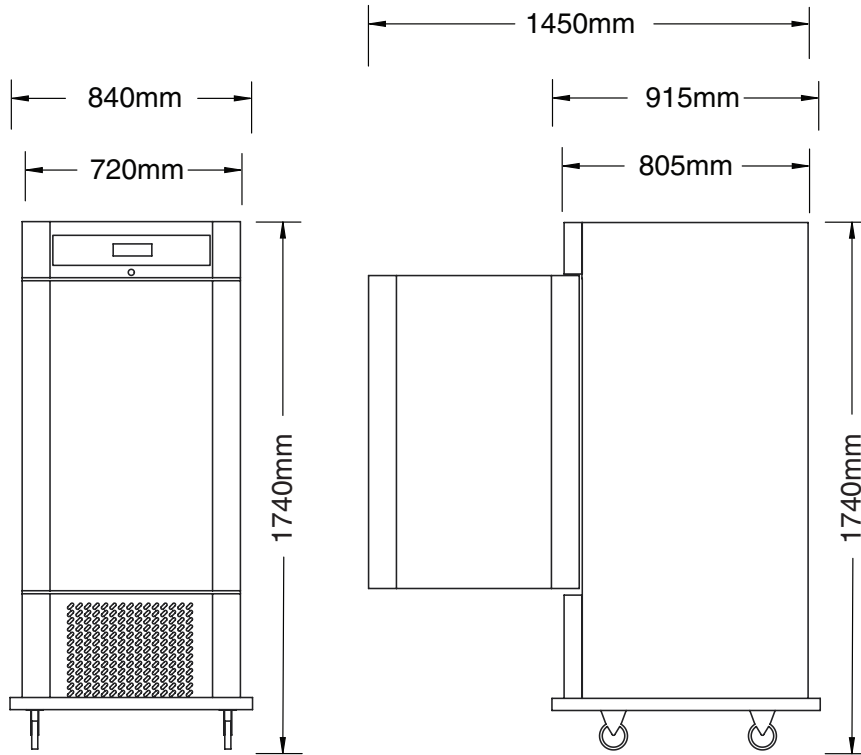

INSTALLATION REQUIREMENTS

- Cart must be installed level.
- Cart must not be installed in any area where it may be affected by steam, grease, dripping water, extreme temperatures, or any other severely adverse conditions.

CLEARANCE REQUIREMENTS

Full perimeter bumper accommodates all clearance requirements.

REFRIGERATION

270g R134a refrigerant
 Refrigeration duty of 1584 Btu/h
 Heat of rejection 2060btu/h

WEIGHT

NET: 130 kg SHIP: 155 kg

CARTON DIMENSIONS: (L x W x H)
 940 mm x 860 mm x 1860 mm

DIMENSIONS: H x W x D

EXTERIOR:

1740 mm x 840 mm x 915 mm

INTERIOR:

960 mm x 595 mm x 670 mm

ELECTRICAL

VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW
220	1	50/60	2.5	.43
CORD INCLUDED (3.5 M)				

PRODUCT/PAN CAPACITY

131 kg MAXIMUM
 VOLUME MAXIMUM: 228 LITERS
 GASTRONORM 1/1:
 Twenty-four (24) 530 mm x 325 mm x 65 mm

OPTIONS & ACCESSORIES

- Shelf, Nylon Coated SH-36682