
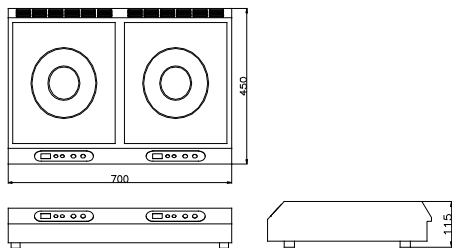


PORTABLE INDUCTION – 2 HOBS

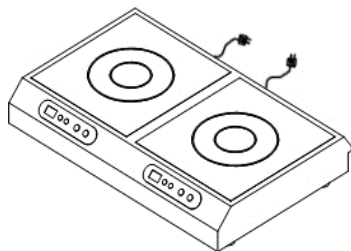

		DESCRIPTION		
Part No.		CK226-E		
Operating Voltage		208/240V , 50/60Hz 1PH		
Power Consumption		Max Output: 5200W		
Amperage		Total: 24A		
Heating Power Setting		Warming: 7 Steps (H1-H7) Cooking: 10 Steps		
Dimension (mm)		Product: 700*450*115 , Packing: 770*520*200		
Weight		13		
Control Method		Integrated panel with button		
Product Type		Counter-top		
Cookware Diameter	Burner L	MIN : ø 130 mm	MAX : ø 300mm	
	Burner R	MIN : ø 130 mm	MAX : ø 300mm	
Loadable Weight	Burner L	MAX 30 Kg		
	Burner R	MAX 30 Kg		
Time Required for Boiling Water	Capacity	5L (10 portions)	10L (20 portions)	15L (30 portions)
	Burner F	Approx. 13 min 30 sec	Approx. 27 min	Approx. 40 min 20 sec
	Burner B	Approx. 13 min 30 sec	Approx. 27 min	Approx. 40 min 20 sec
	Note	※ one portion converted into 500ml ※ start point: 25 °C (room temperature) ※ the abovementioned time can be changed according to actual environment/each different situation		
Main Function		<input checked="" type="checkbox"/> Safety - Over-current indication: Error E1 - Over-voltage indication: Error E2 (above 260V) - Low-voltage indication: Error E3 (below 180V) - Product super-heating indication: Error E4 (internal temperature above 80°C) - Top overheating indication: Error E6 (above 230°C) <input checked="" type="checkbox"/> Warming: H1 ~ H7 (35°C ~ 90°C) <input checked="" type="checkbox"/> Cooking: 1 ~ 10 (same applies to both of 2 hobs)		
Comparison	Item	Induction (1 hole)		City Gas (1 hole)
	kw	2.6		4.64
	kcal/h	2241.38		4000
	kcal/h	2017.242 (90% of efficiency)		2000 (50% of efficiency)
After-Sales Service		1-year warranty (to be charged in case of consumer's negligence)		

BK26-E IMPLEMENTATION

Application Examples



Product Use

- For various dishes through general cooking, shabu-shabu etc.
 - Being utilized in cooking classes thanks to high portability
 - As a warmer after cooking
- ※ Remarks