

Quality at an affordable price

RANKIN-DELUX®

COMMERCIAL COOKING EQUIPMENT

RDCB / RDSCB

Lava - Rock Broilers



Standard Features:

Compact heavy gauge chassis for long life.
 Stainless steel sides and valve cover.
 Double wall side panels for better insulation.
 All welded fire box liner supports lava-rock grates.
 "H"-type cast iron burner, rated at 35,000 BTU/hr for the snack line and 40,000 BTU/hr for the heavy duty line.
 Manual control to individually operate each burner.
 Heavy cast iron top and bottom grates.
 Full width removable crumb pan.

Options:


Stainless steel stand.
 Casters for stand.

Rankin-Delux Lava-Rock Broilers have user friendly heavy duty features with easy to clean stainless steel front and side panels. Standard top grates may lay flat or be set on an angle. The lava-rock style broiler allows for a moist heat and creates unique flavor. Both heavy duty and snack series units come equipped with cast iron burners for even heat distribution. Heavy cast iron bottom grates support the lava rock bed inside a 14 gauge welded fire box liner. Burners, grates, as well as the fire box, are removable for maintenance without special tools.

Due to continuing product development, these specifications are subject to change without prior notice.

RANKIN-DELUX, INC.
Phone: (951) 685-0081 Fax: (951) 685-0084

3245 Corridor Drive
Eastvale, CA 91752-1030

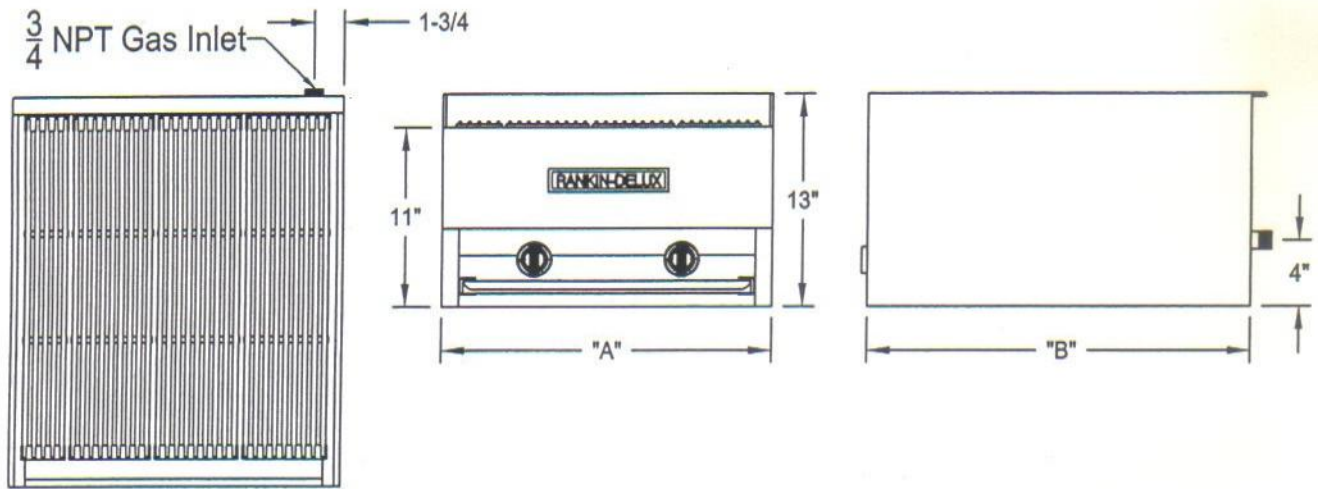

SNACK LAVA-ROCK BROILER

MODEL	WIDTH (A) inch	DEPTH (B) inch	NUMBER OF BURNERS	TOTAL BTU	SHIP WEIGHT lbs / kg
RDSCB-12	12"	23"	1	35,000	113 / 52
RDSCB-18	18"	23"	1	35,000	135 / 62
RDSCB-24	24"	23"	2	70,000	160 / 73
RDSCB-36	36"	23"	3	105,000	268 / 122
RDSCB-48	48"	23"	4	140,000	395 / 180

HEAVY DUTY LAVA-ROCK BROILER

MODEL	WIDTH (A) inch	DEPTH (B) inch	NUMBER OF BURNERS	TOTAL BTU	SHIP WEIGHT lbs / kg
RDCB-18	18"	28"	1	40,000	240 / 109
RDCB-24	24"	28"	2	80,000	262 / 119
RDCB-30	30"	28"	3	120,000	309 / 141
RDCB-36	36"	28"	3	120,000	383 / 174
RDCB-48	48"	28"	4	160,000	441 / 201
RDCB-60	60"	28"	5	200,000	498 / 227

Gas connection: 3/4" NPT on the right hand rear of the appliance. The pressure regulator (supplied) is to be connected at the inlet by the installer.

Gas pressure: 5" W.C. – Natural gas 10" W.C. – Propane

Clearances: Sides 0" Specify type of gas and altitude if over 2,000 feet when ordering.

Rear 0" For use only in non-combustible locations.

RANKIN-DELUX, INC.
 Phone: (951) 685-0081 • Fax: (951) 685-0084

3245 Corridor Drive
Eastvale, CA 91752-1030