

*Quality at an affordable price***RANKIN-DELUX®****COMMERCIAL COOKING EQUIPMENT**

RDRB / RDSRB

Radiant Broilers, Combinations

Standard Features:


- ◆ Compact heavy gauge chassis for long life.
- ◆ Stainless steel sides and front valve cover.
- ◆ Double wall panels for better insulation.
- ◆ All welded fire box supports heavy duty radiant covers.
- ◆ Steel tubular burners rated at 15,000 BTU/hr in the heavy duty and combo (RDRB) models,
- ◆ Open burners feature two piece lift off tops of heavy cast iron rated at 30,000 BTU/hr.
- ◆ All burners are controlled by individual valves and each one has a standing pilot for rapid and safe ignition.
- ◆ Heavy duty cast iron top grates.
- ◆ Full width removable crumb pan under the broiler, with a separate pan under the open burner section in the combination models.
- ◆ Full heavy stainless steel plate ledge complements the work surface and aids in food handling.
- ◆ 4" high adjustable heavy duty legs included.



Options:

- ◆ Round rod grate for the broiler section.
- ◆ Removable front 8" to 10" plate shelf, solid or cutout for sauce pans.
- ◆ 10" diameter stainless steel wok rings to fit on top grate for open burners.
- ◆ Interchangeable wok or saute burner heads for open burners.
- ◆ Stainless steel stand with adjustable legs.
- ◆ Casters for the stand.
- ◆ S/S splash guard, up to 12" high, sides tapered to 4" in front.

Rankin-Delux Broilers meet the need for high performance underfired cooking. Heavy duty and Snack radiant broilers come with heavy duty cast iron radiants and tubular steel burners. Quality insulated chassis and burner placement ensure even heat distribution. Standard cast iron top grate configuration gives the operator flexibility to cook rare, medium and well-done food simultaneously. Combination units add two or four open top burners to increase efficiency and add flexibility for the crowded kitchen facility.

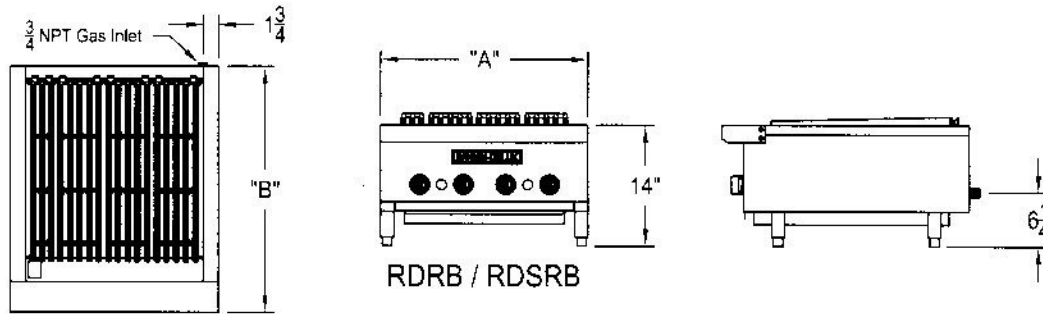

SNACK RADIANT BROILER

MODEL	WIDTH (A) inch	DEPTH (B) inch	NUMBER OF BURNERS	TOTAL BTU	SHIP WEIGHT lbs / kg
RDSRB-12	12	26	1	12,500	113 / 51
RDSRB-18	18	26	3	37,500	150 / 68
RDSRB-24	24	26	4	50,000	197 / 90
RDSRB-30	30	26	5	62,500	260 / 118
RDSRB-36	36	26	6	75,000	311 / 141
RDSRB-48	48	26	8	100,000	365 / 166

HEAVY DUTY RADIANT BROILER

MODEL	WIDTH (A) inch	DEPTH (B) inch	NUMBER OF BURNERS	TOTAL BTU	SHIP WEIGHT lbs / kg
RDRB-12	12	29-3/4	1	15,000	170 / 77
RDRB-18	18	29-3/4	3	45,000	235 / 107
RDRB-24	24	29-3/4	4	60,000	300 / 136
RDRB-30	30	29-3/4	5	75,000	340 / 155
RDRB-36	36	29-3/4	6	90,000	383 / 174
RDRB-48	48	29-3/4	8	120,000	460 / 209
RDRB-60	60	29-3/4	10	150,000	510 / 232
RDRB-72	72	29-3/4	12	180,000	670 / 305

RADIANT BROILER / OPEN BURNER COMBO

MODEL	WIDTH (A) inch	DEPTH (B) inch	NUMBER OF BURNERS	TOTAL BTU	SHIP WEIGHT lbs / kg
RDRB-12OB2	24	29-3/4	1R / 2 OB	75,000	255 / 116
RDRB-18OB2	30	29-3/4	3R / 2 OB	105,000	330 / 150
RDRB-24OB2	36	29-3/4	4R / 2 OB	120,000	395 / 180
RDRB-24OB4	48	29-3/4	4R / 4 OB	180,000	455 / 207
RDRB-30OB2	42	29-3/4	5R / 2 OB	135,000	435 / 198
RDRB-30OB4	54	29-3/4	5R / 4 OB	195,000	495 / 225
RDRB-36OB2	48	29-3/4	6R / 2OB	150,000	480 / 218

Gas connection: 3/4" NPT on the right hand rear of the appliance. The pressure regulator (supplied) is to be connected at the inlet by the installer.

Gas pressure: 5" W.C. - Natural gas 10" W.C. - Propane

Clearances: For use only in non-combustible location.

Specify type of gas and altitude if over 2,000 feet when ordering.

RANKIN-DELUX, INC.

Phone: (951) 685-0081 • Fax: (951) 685-0084

**3245 Corridor Drive
Eastvale, CA 91752-1030**